

ESTES

MS200 TWIST SHIFTER INSTALLATION



MICROSHIFT

TOOLS AND SUPPLIES:

Tools and Supplies	1
--------------------	---

INSTALLATION:

1	Setup the cockpit	2
2	Proper shifter position	3
3	Tightening the shifter	4
4	Cable routing	5


1 Hex Wrench Set



1 SETUP THE COCKPIT

1/1

Start by standing over the bike on flat ground. Install the brake lever and then the shifter onto the handlebar. Adjust the brake levers to your preference.

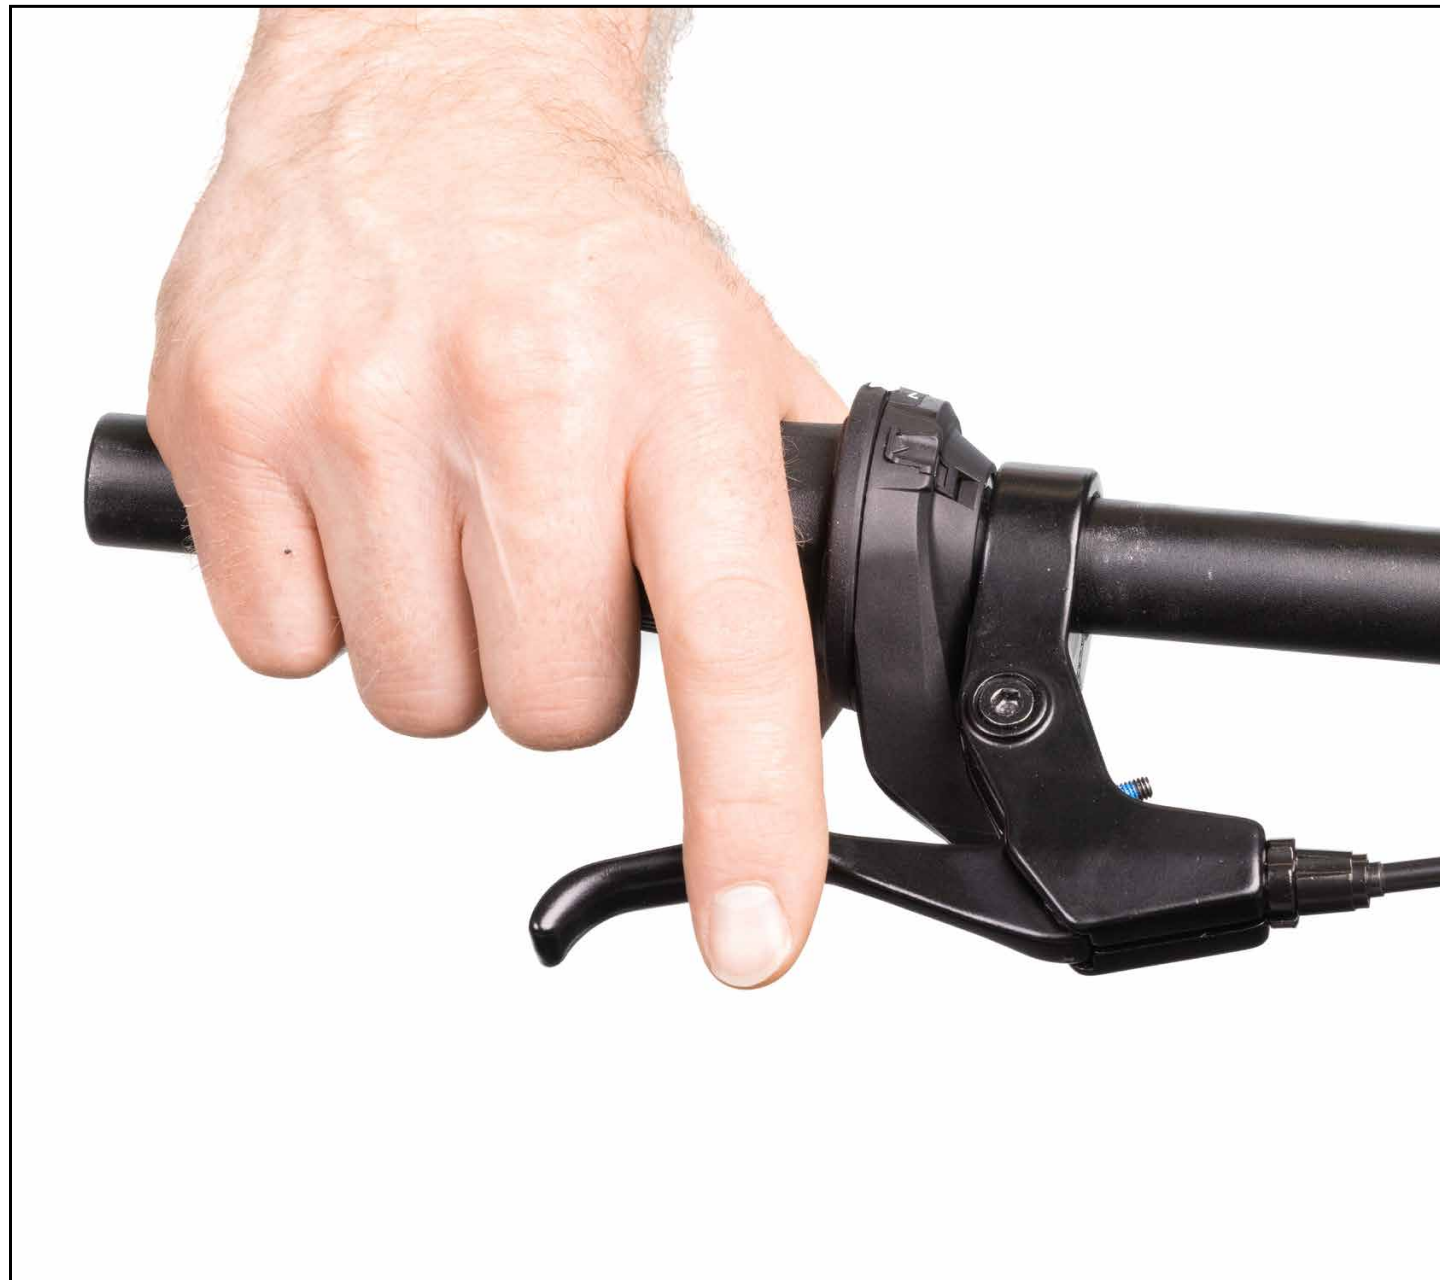

2

2 PROPER SHIFTER POSITION

1/1

Route the **barrel adjuster** to the underside of the brake lever. This allows the gear indicator face the rider.



3

Tighten the clamp bolt to **2.5 Nm** using a 3mm hex wrench.



Rotate the shifter forward, putting the shifter in the smallest cog or smallest chain ring position.



Remove the cable port cover by sliding it out of its groove.



Route the cable into the cable port and out through the barrel adjuster.



Install the **cable port cover** by sliding into its groove.



MICROSHIFT