


microSHIFT

Drop Bar Shifter Cable Installation



Important Notice

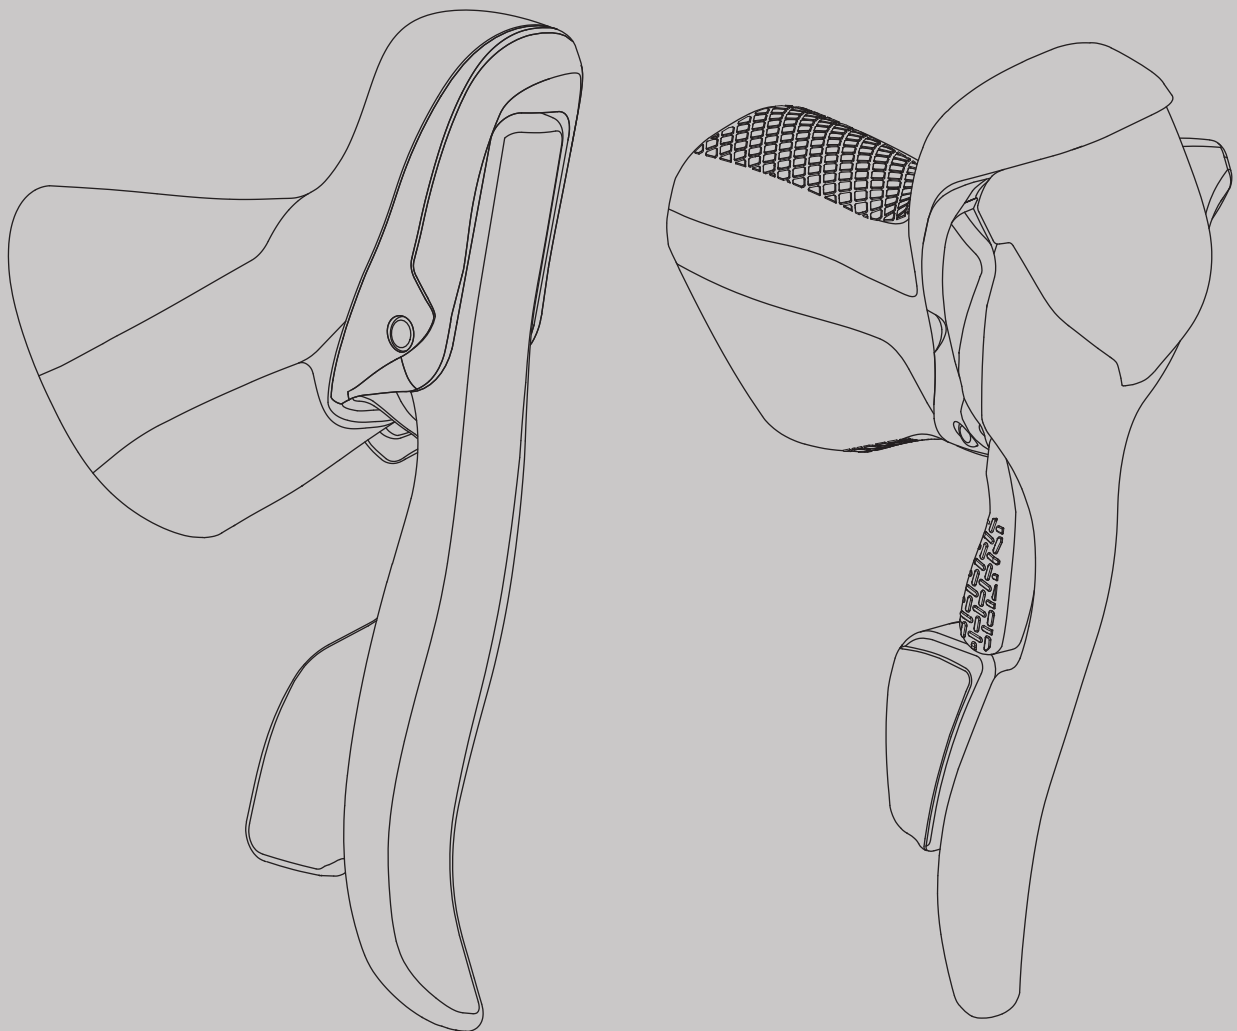


REMINDER

Before installing the products, please read and understand the installation procedures. Improper installation can lead to premature product failures or even injuries. If you have any questions on how to install, please contact us or consult with a professional bicycle mechanic.

External - Drop Bar Shift Cable Replacement

Part I


Press the **small shift paddle** until it stops clicking and the derailleur is in the small cog or small chainring position

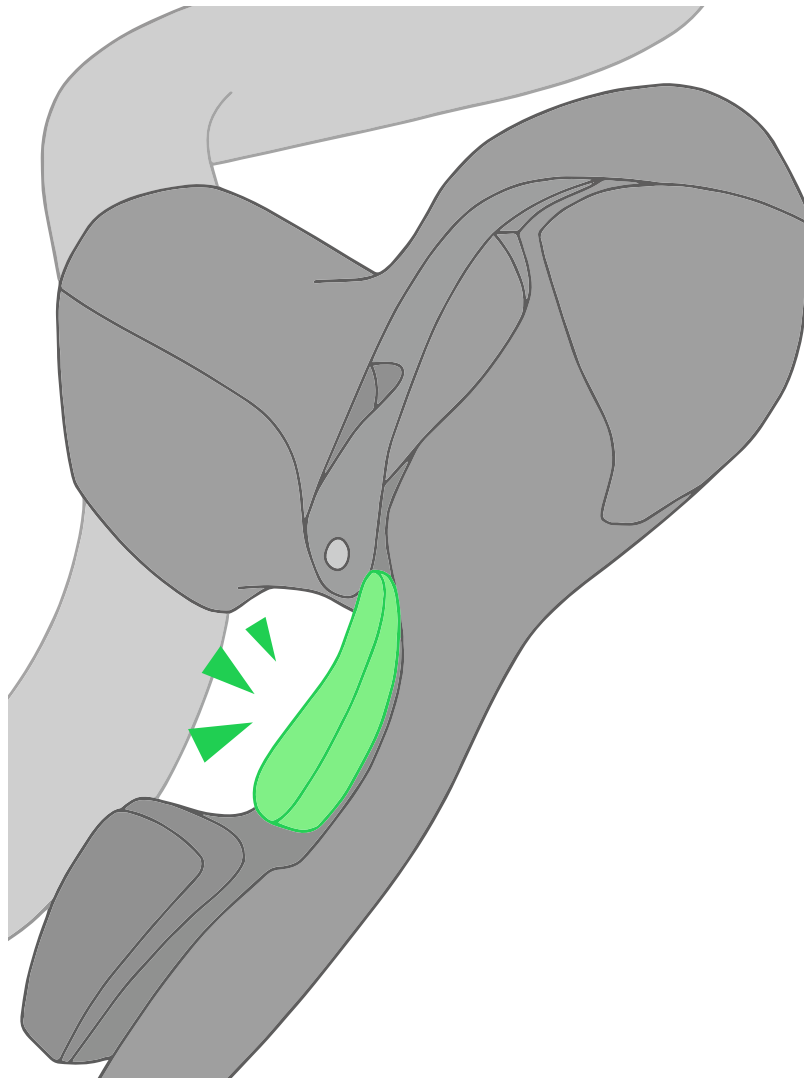

External - Drop Bar Shift Cable Replacement

Part II


Depress the brake lever and push the **cable out through the cable head seat.**

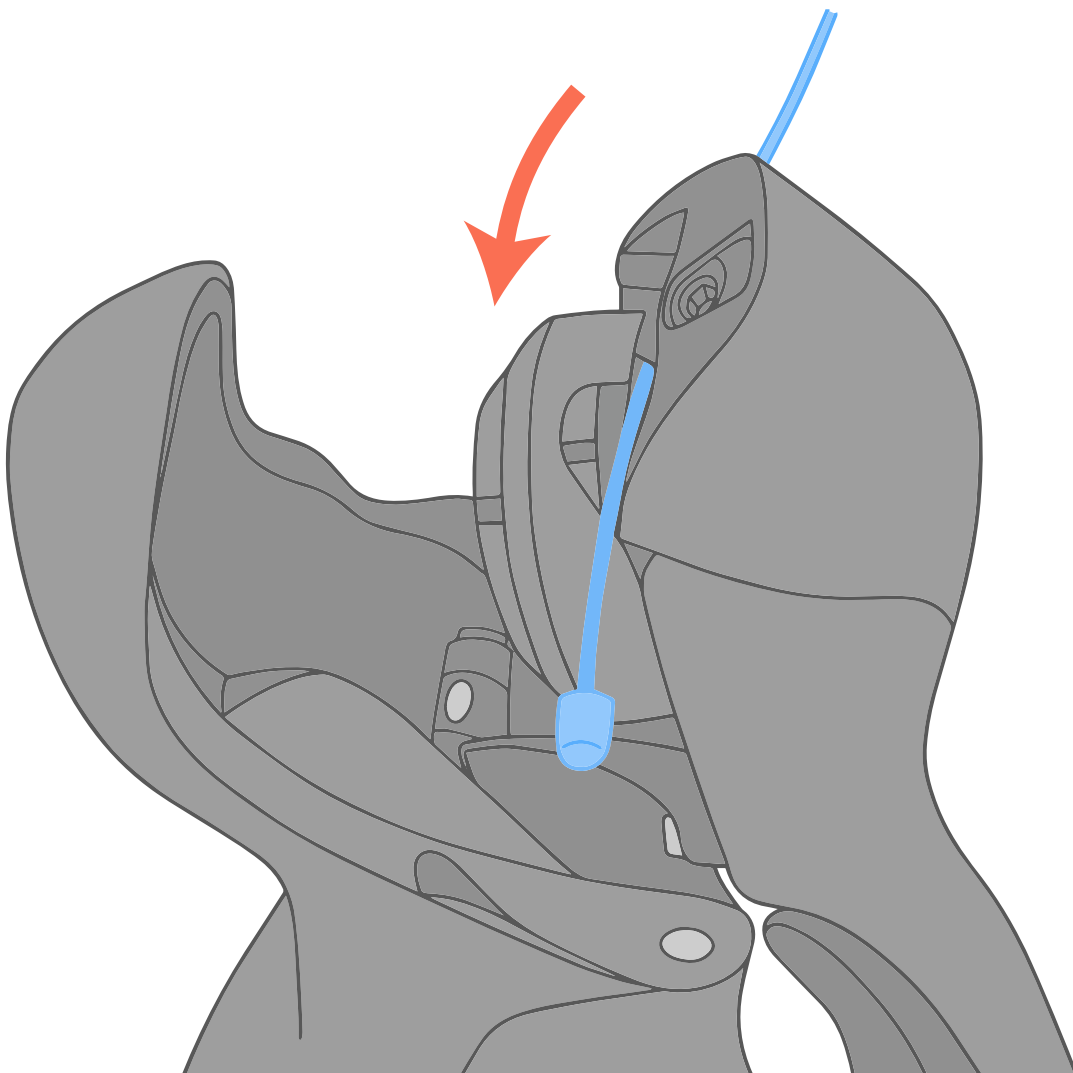

External - Drop Bar Shift Cable Replacement

Part III

Route the new cable through the cable head seat and out through the barrel adjuster. Make sure the **cable head** is fully seated

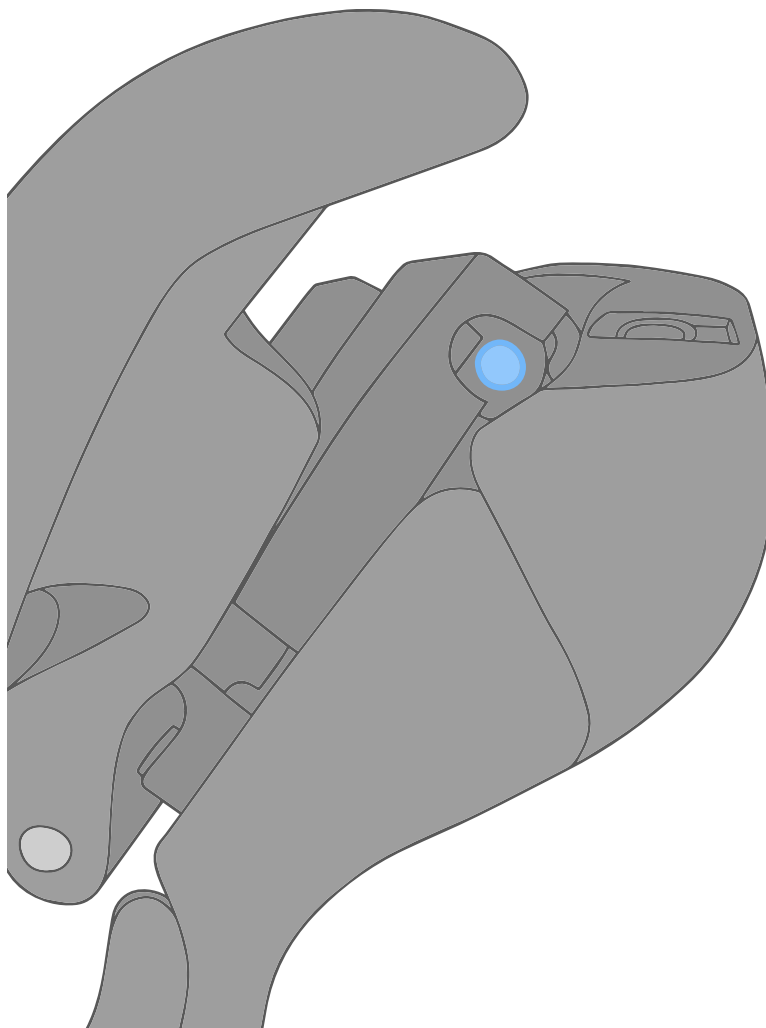


External - Drop Bar Shift Cable Replacement

Part IV

NOTE: Our MTB and IGH drop bar shifters do not have return springs. They rely on the derailleur's spring tension to up shift.


If you have disconnected the shift cable before putting the shifter in the small cog position, gently pull on the cable while depressing **the small shift paddle**. If no cable is installed, **press the cable head seat** with a **pen** while **depressing the small shift paddle**.

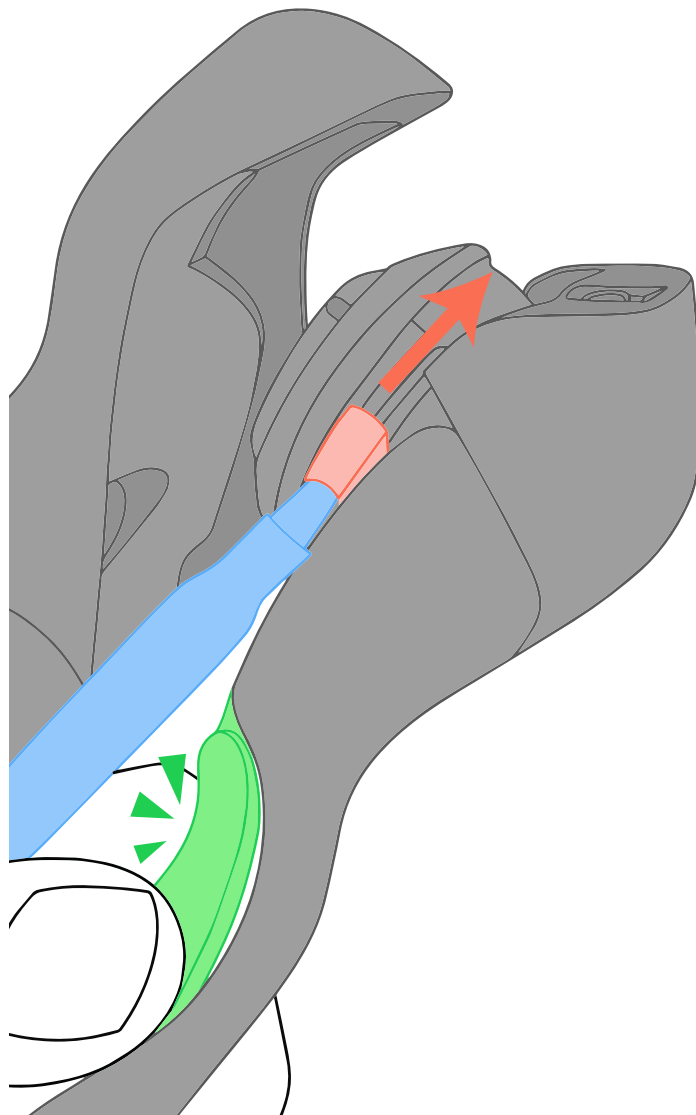


Internal - Drop Bar Shift Cable Replacement

Part I


Press **the thumb button** until it stops clicking and the derailleur is in the small cog or small chainring position

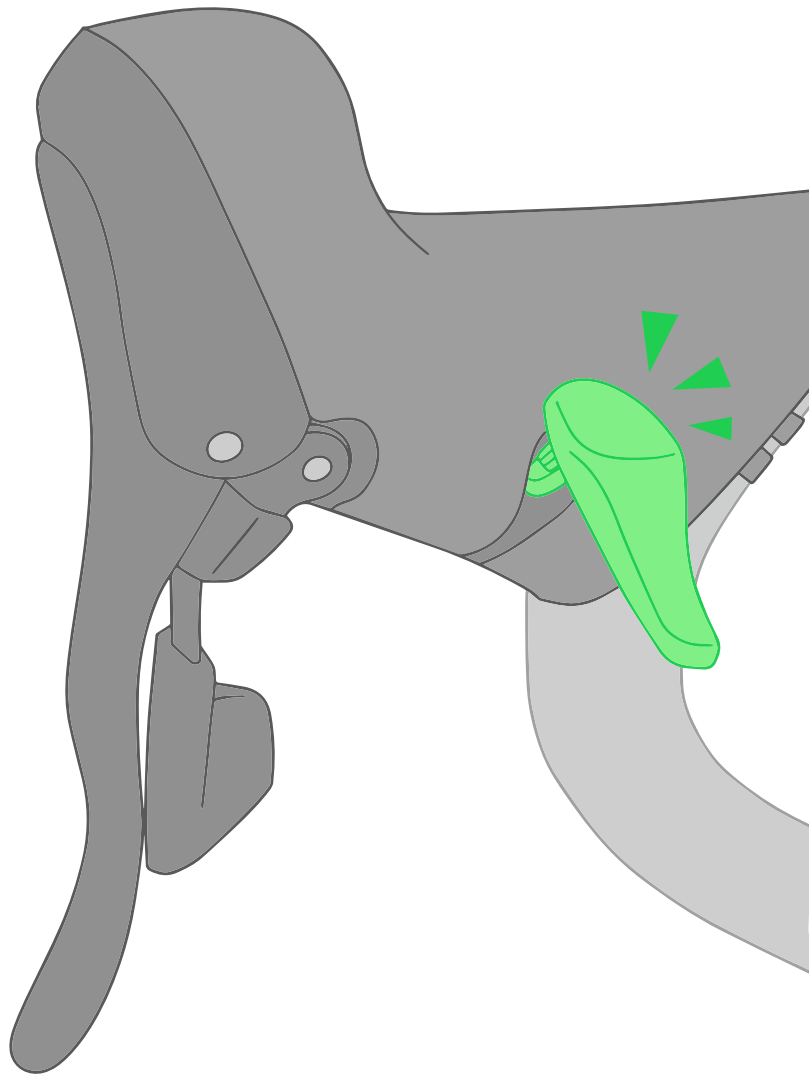

Roll the **hood** towards the brake lever.

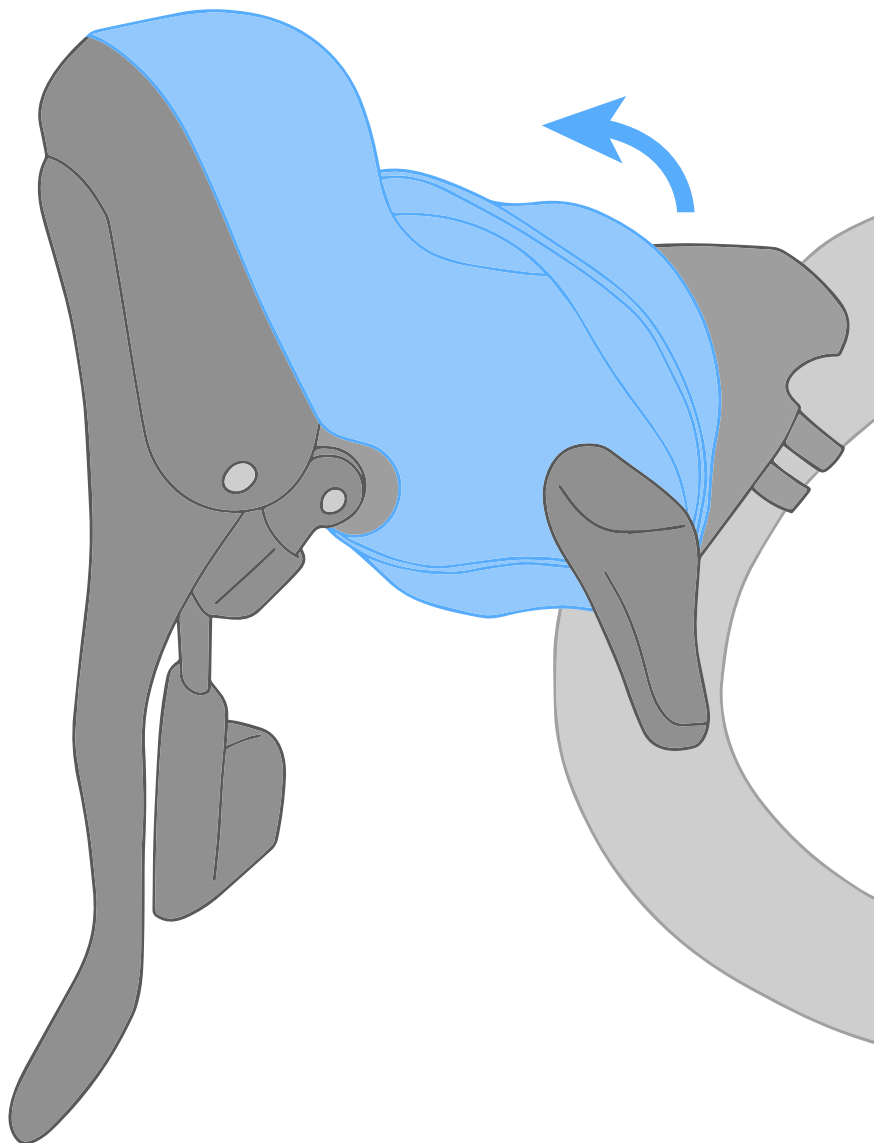

Push the shift cable down and out through the access port located at the bottom of the shifter.

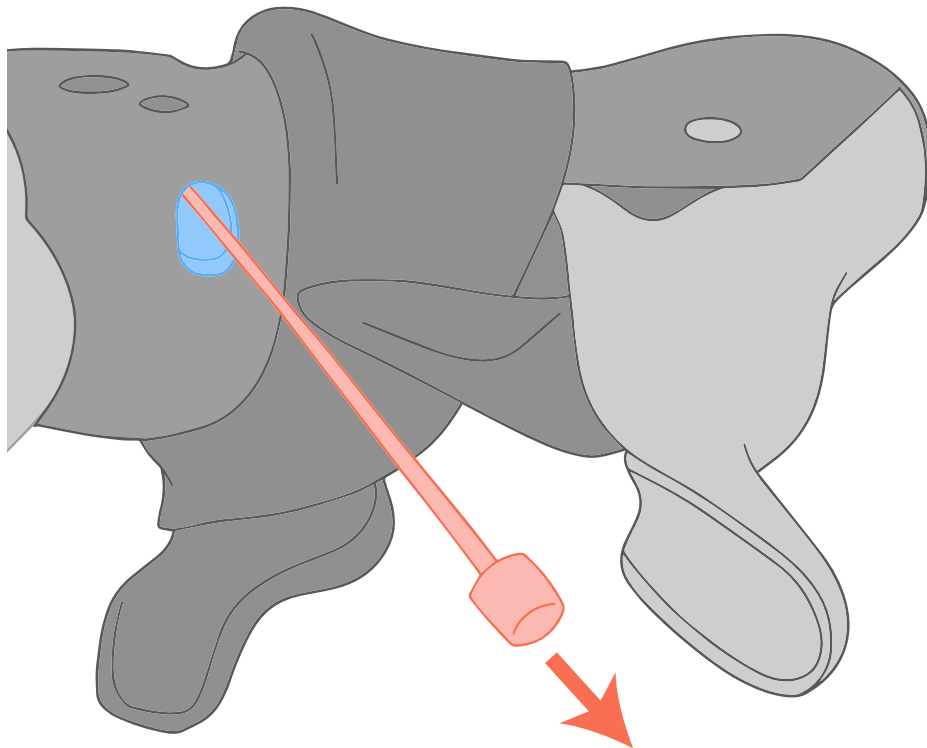

Rout the new cable through the cable port at the bottom of the shifter. Make sure the cable head is fully seated.

microSHIFT

www.microSHIFT.com

International
service-tw@microSHIFT.com

North America
service@microSHIFT.com